

ELECTRONIC BALLAST

IG25-32ELSK

- One Lamp
- Multi-Watt
- Small Case Size
- High Heat
- Lightweight
- Energy Saving

HIGH TEMP
90°C



Features & Benefits

Wide lamp versatility, suitable for one F25T8, CFQ26W/G24q, CFTR26W/GX24q, or CFTR32W/GX24q lamp

Class A Sound Rating

End of Lamp Life Protection

More efficient compared to standard magnetic ballasts

Contains No PCBs

Eliminates strobing

Thermal potting

Metal enclosure

Rapid Start




RoHS
compliant


SPECIFICATIONS

- Operating Voltage: 120 VAC \pm 10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CUL Listed
- Min. Starting Temp: 0°F (-17.78°C)
- Max. Case Temp: 194°F (90°C)
- Over Current: Fuse
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

DIMENSIONS

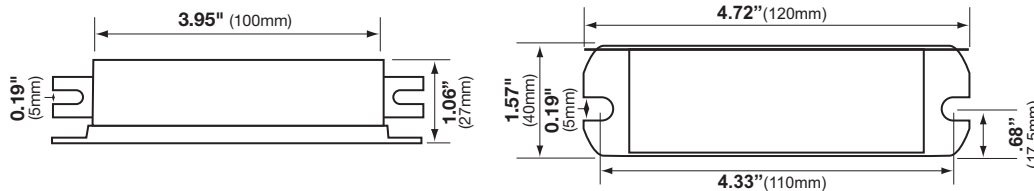

WIRING DIAGRAM



Weight: 6.7oz. Case Quantity: 50pcs Case Weight: 25.5 lbs Standard Lead Length: black/white-12" blue/red-27"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	F25T8	0.34	22.0	0.54	1.60	0.80	104.6	0°F
120	CFQ26W/G24q	0.29	22.0	0.555	1.58	0.83	107.2	0°F
120	CFTR26W/GX24q	0.33	21.0	0.553	1.66	0.74	106.5	0°F
120	CFTR32W/GX24q	0.36	23.0	0.563	1.57	0.69	104.5	0°F

For warranty information refer to Inter-Global's BALLAST LIMITED WARRANTY in the back of the Ballast section of this catalog.

For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com
Specifications subject to change without notice. Printed in U.S.A. © 2017 Inter-Global Inc.

1708.1