

Recessed Double Contact Lampholders

For 800 and 1500mA Lamps



1640 Series Slide-On Lampholders

Suitable for outdoor applications when properly enclosed. Slide wire horizontal contacts on both ends.



Specifications

Rating: 660 Watts, 600 V.

Listing: UL File No. E-13408; CSA File No. LR95423.

UL listed and CSA certified for outdoor use in enclosed signs and fixtures

Mounting: Slide-On

Materials

Housing: White urea

Contacts: Horizontal silver plated phosphor bronze



Termination: "Wire fast" terminals for No. 18 AWG stranded (twisted, tinned and solder dipped or fused) or No. 18 AWG solid copper wire with 3/8" strip length.

1640.1
Spring Loaded

1640.2
Stationary

Panel to Panel Spacing

Nominal lamp length minus 1/8 plus 0

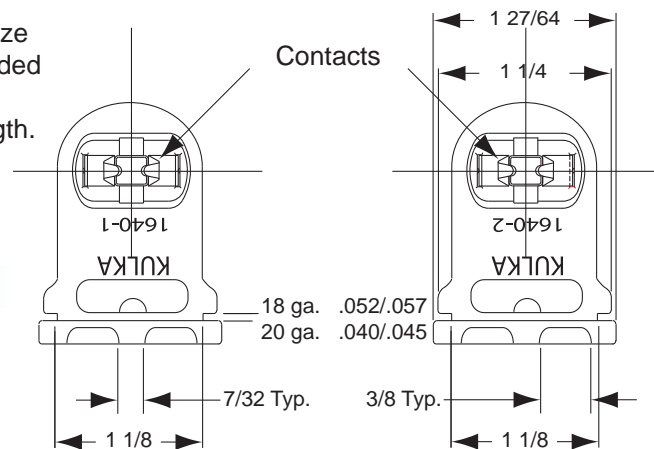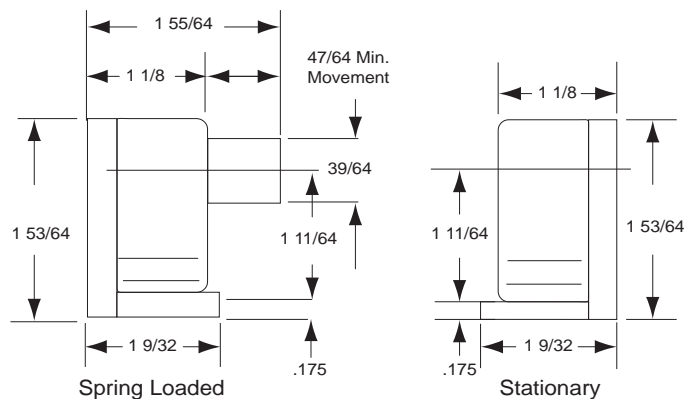

Kulka® 1640 Series

| Spring Part No. | Stationary Part No. |
|-----------------|---------------------|
|-----------------|---------------------|

1640.1 1640.2 Slide-On for 20 gauge panels.

Packed 400/ box.